



HYDRAULIC WOOD SPLITTERS & CHIPPERS

285633 Airport Rd. Norwich, ON. N0J 1P0
Ph. (519) 468-3647
Fax (877) 256-9131
WWW.SPLIT-FIRE.COM


3PT hitch PTO PUMP KIT

Specifications (HC-PTO-2A)

- 11.4GPM @ 540RPM (maximum 600RPM)
- Weight of 41LBS
- Oil operating temperature max is 180F (82C)

Installation:

- Slide the pto pump onto the pto shaft, make sure the pump will be driven in the direction indicated by the arrow on the pump. There is no right way up or down for the pump. (Google PRICE PTO PUMP for more ideas on pump placement.)
- A shaft extension might be required if you don't have clearance to slide the pump onto the shaft.
- Secure pump with a chain to one of the 3pt hitch arms. Chain should be perpendicular to slightly forward or perpendicular to the shaft.
- Ready for operation.

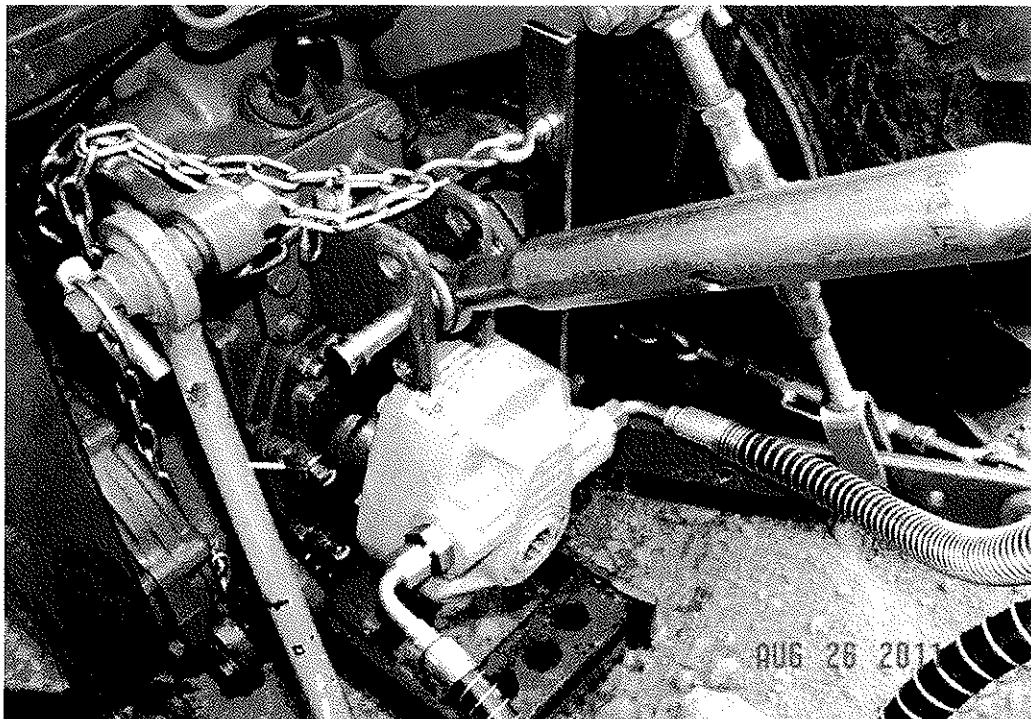

PRINCE PTO-PUMP INSTALLATION EXAMPLE

